




[www.boumatic.com](http://www.boumatic.com)



# SmartLite™

**DETACH SMART,**

**IMPROVE PERFORMANCE**

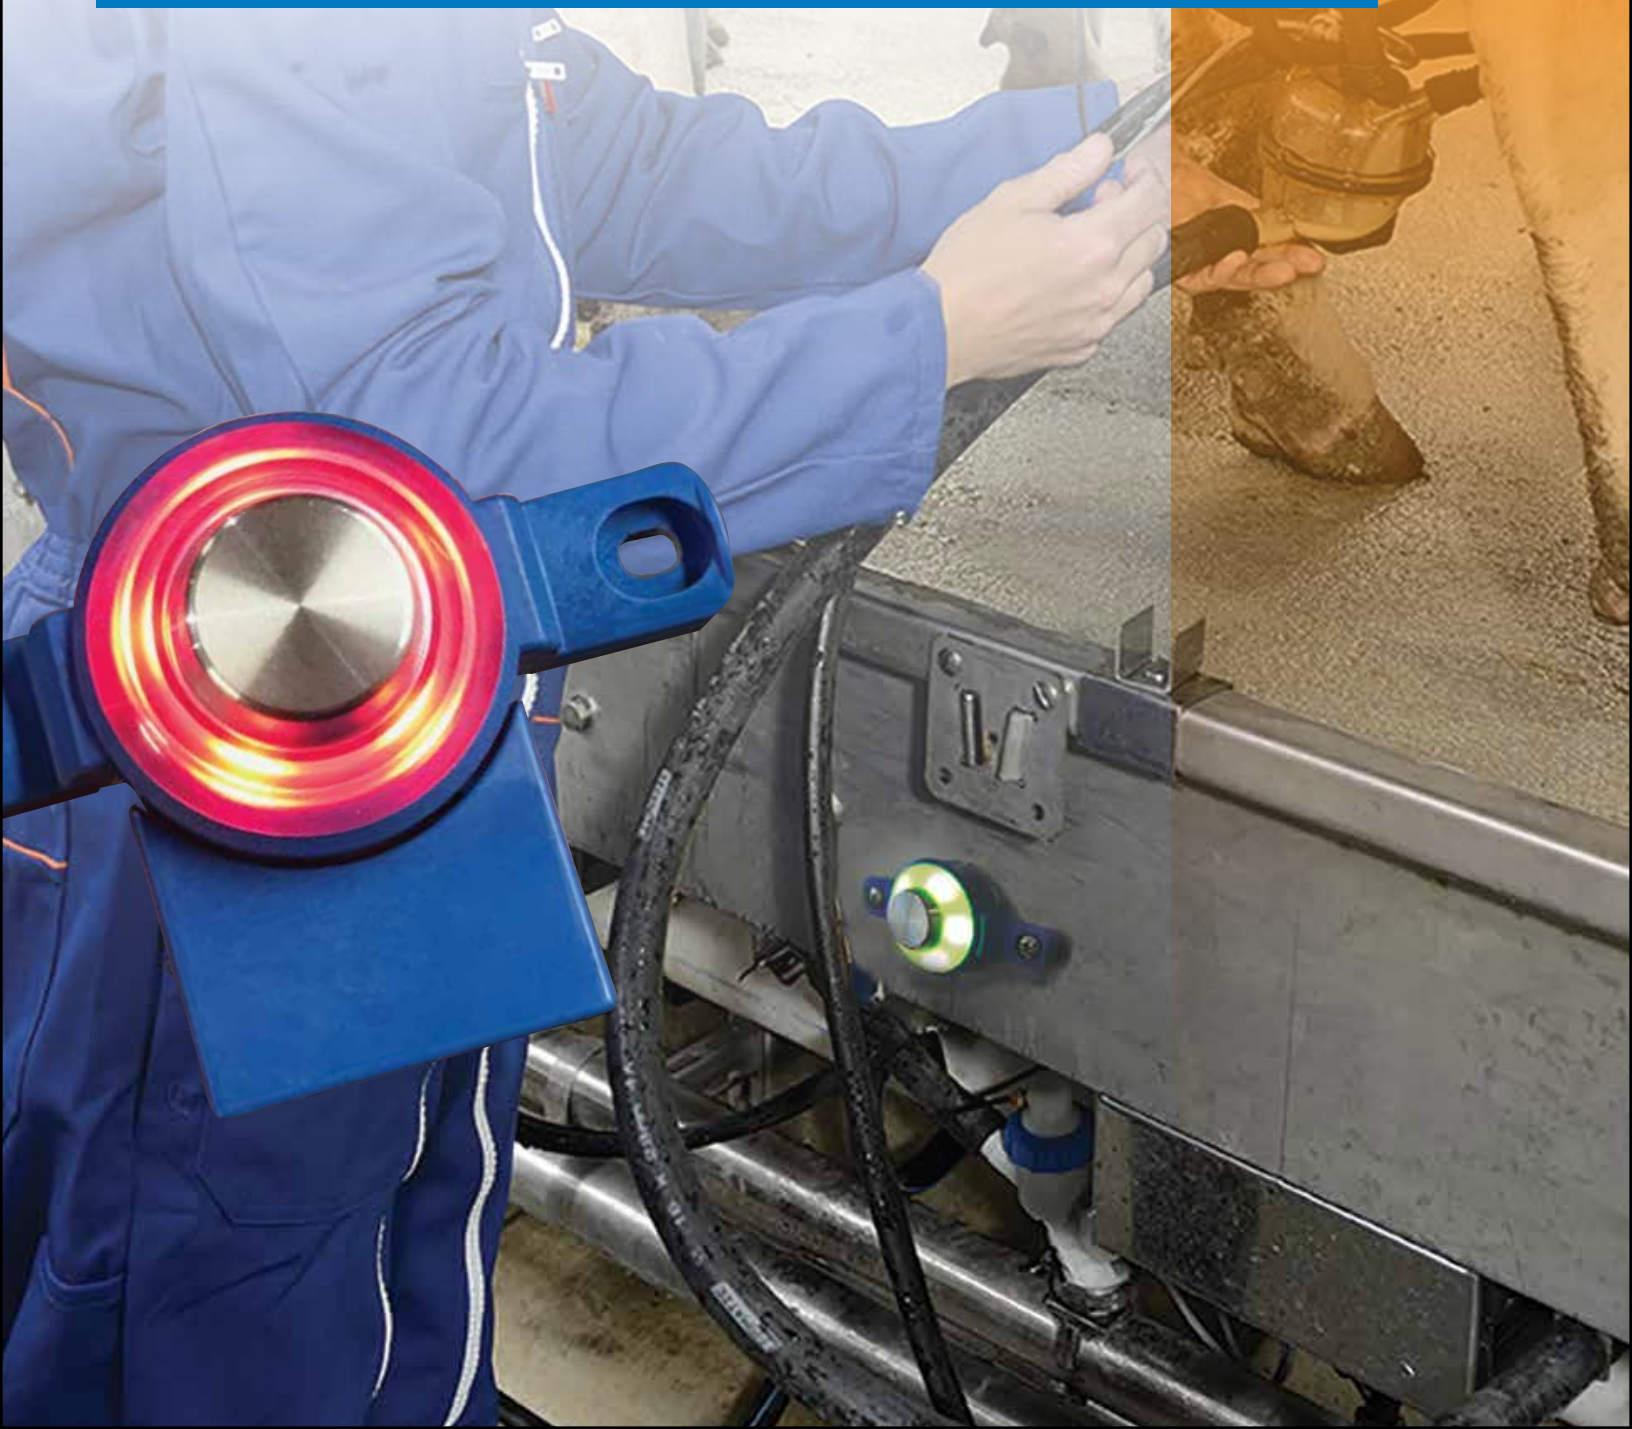

# SmartLite™

## DETACH SMART,

## IMPROVE PERFORMANCE

*The innovative SmartLite™ detacher system is designed to manage 4 milking points with one single control unit. It uses a very accurate resistance sensor to measure the milk flow. This special sensor has a wide measuring range which provides you with the flexibility to set the minimum milk flow for detaching the milking, aligning it perfectly with the BouMatic high-flow concept.*

**The SmartLite™ detacher is simple and convenient and will improve comfort and milking performance.**

- **Clear Milking Status Information** – With BouMatic's stainless steel button surrounded by a bright, multi-colored LED you have an instant overview of the milking status at each stall and can react to any challenges that may arise.
- **Economical** – Design has one control unit for every 4 milking points
- **Accuracy** – Resistance Sensor has a wide measuring range with the flexibility to set the minimum milk flow for detaching the milking cluster from low (under 250g/mn) to high flow rates (above 1000g/mn)
- **Simplicity and Convenience** – Single-button operation for functions such as Start/Stop and Manual/Automatic; by just lifting the cluster, QuickStart activates to start the milking process for you
- **Compatibility** – Works with the BouMatic shut off valve range for new and retrofit applications
- **Easy Installation** – The control unit can be easily mounted onto the metal frame of the stall or under the curb



PO Box 8050  
Madison, WI 53708-8050  
T 608.222.3484 F 608.222.9314

Transportweg 6  
8304 AX Emmeloord, The Netherlands  
T +31 (0)527 78 85 00 F +31 (0)527 78 85 99

 **BouMatic.com**

©2015 BouMatic. All Rights Reserved. LIT-2709-15-Q03EN